

FORM PTO-1390 (Modified)
(REV 10-95)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

1628

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

097868143

INTERNATIONAL APPLICATION NO.
PCT/DE 00/03655

INTERNATIONAL FILING DATE
OCTOBER 18, 2000

PRIORITY DATE CLAIMED
OCTOBER 21, 1999

TITLE OF INVENTION

WIPER SYSTEM FOR VEHICLES AND METHOD FOR DRIVING A WIPER LEVER LINKAGE

APPLICANT(S) FOR DO/EO/US

Joachim ZIMMER

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ A copy of the International Search Report (PCT/ISA/210).
8. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 13 to 18 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
A **SECOND** or **SUBSEQUENT** preliminary amendment.
16. ☐ A substitute specification.
17. ☐ A change of power of attorney and/or address letter.
18. ☒ Certificate of Mailing by Express Mail
19. ☐ Other items or information:

ET 292 830 H2 US

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/868143

INTERNATIONAL APPLICATION NO.

PCT/DE 00/03655

ATTORNEY'S DOCKET NUMBER

1628

20. The following fees are submitted.:

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :

- ☐ Search Report has been prepared by the EPO or JPO \$930.00
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) \$720.00
- ☐ No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) \$790.00
- ☒ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$1,070.00
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) \$98.00

ENTER APPROPRIATE BASIC FEE AMOUNT =**CALCULATIONS PTO USE ONLY**

\$1,000.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).

\$0.00

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	11 - 20 =	0	x \$18.00
Independent claims	1 - 3 =	0	x \$80.00

\$0.00

\$0.00

Multiple Dependent Claims (check if applicable). ☐

\$0.00

TOTAL OF ABOVE CALCULATIONS =

\$1,000.00

Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). ☐

\$0.00

SUBTOTAL =

\$1,000.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).

\$0.00

TOTAL NATIONAL FEE =

\$1,000.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). ☒

\$40.00

TOTAL FEES ENCLOSED =

\$1,040.00

Amount to be:

refunded

\$

charged

\$

- ☐ A check in the amount of _____ to cover the above fees is enclosed.
- ☒ Please charge my Deposit Account No. **19-4675** in the amount of **\$1,040.00** to cover the above fees.
A duplicate copy of this sheet is enclosed.
- ☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **19-4675** A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

STRIKER, STRIKER & STENBY
103 EAST NECK ROAD
HUNTINGTON, NEW YORK 11743

SIGNATURE

MICHAEL J. STRIKER

NAME

27233

REGISTRATION NUMBER

JUNE 15, 2001

DATE

09/868143

JCO3 Res'd PCT/FTO 15 JUN 2001

UNITED STATES PATENT AND TRADEMARK OFFICE

Examiner: Group: Attorney Docket # 1628

Applicant(s) : ZIMMER, J.

Serial No. :

Filed : Simultaneously

For : WIPER SYSTEM FOR VEHICLES AND METHOD
FOR DRIVING A WIPER LEVER LINKAGE

SIMULTANEOUS AMENDMENT

June 14, 2001

Honorable Commissioner of Patents and Trademarks
Washington, D.C. 20231

S I R S:

Simultaneously with filing of the above identified application
please amend the same as follows:

In the Claims:

Cancel all claims without prejudice.

Substitute the claims attached hereto.

REMARKS:


This Amendment is submitted simultaneously with filing of the above identified
application.

With the present Amendment applicant has amended the claims so as to eliminate
their multiple dependency.

09/868143

Consideration and allowance of the present application is most respectfully requested.

Respectfully submitted,


Michael J. Striker
Attorney for Applicant(s)
Reg. No. 27233

0906417-004504

Claims

1. A wiper system for vehicles, having at least one wiper
5 lever linkage that has at least one wiper arm and that includes a
first pivot lever, which can be coupled to a stationary first
shaft in a manner fixed against relative rotation, and a second
pivot lever that can be coupled to a stationary second shaft in a
manner fixed against relative rotation, the pivot levers being
10 connected in articulated fashion to a coupling element,
characterized in that the coupling element (9) is embodied in
multiple parts and has a first coupling part (11) and a second
coupling part (13), which are coupled to one another with the aid
of a joint (15).

2. The wiper system of claim 1, characterized by a drive
device (41) for the wiper lever linkage (3), which device
includes at least one first drive crank (43) that can be coupled
in a manner fixed against relative rotation to the first shaft
20 (21) or the second shaft (29).

3. The wiper system of [one of the foregoing claims]
claim 1, characterized in that the first drive crank (43) can be
coupled to the first shaft (21) in a manner fixed against
25 relative rotation, and that the drive device (41) has a second
drive crank (45) that can be coupled in a manner fixed against
relative rotation to the second shaft (29).

4. The wiper system of [one of the foregoing claims]
30 claim 1, characterized by a coupling member (47), which joins the
first and second drive cranks (43, 45) to one another and which
is coupled to the drive cranks (43, 45) via a respective joint

(49, 51), and that at least one engine crank (59) is connected in articulated fashion to the first drive crank (43) or the second drive crank (45).

5 5. The wiper system of [one of the foregoing claims 1- 3] claim 1, characterized in that the first and second drive cranks (43, 45) are each connected in articulated fashion to a respective engine crank (59, 67).

10 6. The wiper system of [one of the foregoing claims] claim 1, characterized in that the engine crank (59, 67) is displaceable transversely, or essentially transversely, to the first and second shafts (21, 29).

15 7. The wiper system of [one of the foregoing claims] claim 1, characterized in that the second coupling part (13) is longer, preferably markedly longer, than the first coupling part (11).

20 8. The wiper system of [one of the foregoing claims] claim 1, characterized in that the wiper arm (35) is secured to one of the first and second coupling parts (11, 13), preferably the longer coupling part (13).

25 9. The wiper system of [one of the foregoing claims] claim 1, characterized in that the joints (17, 19) between the pivot levers (5, 7) and the coupling element (9) and the additional joint (15) between the coupling parts (11, 13) are embodied as cylindrical joints, whose pivot axes extend parallel
30 to one another and preferably parallel to the first and second shafts (21, 29).

10. A method for operating a wiper lever linkage of a wiper system for vehicles, the wiper lever linkage having at least one wiper arm, in particular of [one or more of the foregoing claims] claim 1, which wiper lever linkage includes a first pivot lever, which can be coupled to a stationary first shaft in a manner fixed against relative rotation, a second pivot lever which can be coupled to a stationary second shaft in a manner fixed against relative rotation, a first drive crank which can be coupled to the first shaft in a manner fixed against relative rotation, a second drive crank which can be coupled to the second shaft in a manner fixed against relative rotation, and a coupling member connected in articulated fashion to the drive cranks, having the following steps:

- during one wiping cycle, the first and second drive cranks are first pivoted out of an outset position of the wiper lever linkage in the same direction until they are in an extended position, in which the coupling member and the first drive crank are aligned with one another;

- next, upon a displacement of the wiper lever linkage out of the extended position into a turning point position, the first drive crank is pivoted onward in the same direction and the second drive crank is pivoted onward in the opposite direction.

11. The method of claim 10, characterized in that the pivoting motions of the drive cranks are dependent on one another.

Claims

1. A wiper system for vehicles, having at least one wiper lever linkage that has at least one wiper arm and that includes a first pivot lever, which can be coupled to a stationary first shaft in a manner fixed against relative rotation, and a second pivot lever that can be coupled to a stationary second shaft in a manner fixed against relative rotation, the pivot levers being connected in articulated fashion to a coupling element, characterized in that the coupling element (9) is embodied in multiple parts and has a first coupling part (11) and a second coupling part (13), which are coupled to one another with the aid of a joint (15).

2. The wiper system of claim 1, characterized by a drive device (41) for the wiper lever linkage (3), which device includes at least one first drive crank (43) that can be coupled in a manner fixed against relative rotation to the first shaft (21) or the second shaft (29).

3. The wiper system of claim 1, characterized in that the first drive crank (43) can be coupled to the first shaft (21) in a manner fixed against relative rotation, and that the drive device (41) has a second drive crank (45) that can be coupled in a manner fixed against relative rotation to the second shaft (29).

4. The wiper system of claim 1, characterized by a coupling member (47), which joins the first and second drive cranks (43, 45) to one another and which is coupled to the drive cranks (43, 45) via a respective joint (49, 51), and that at

least one engine crank (59) is connected in articulated fashion to the first drive crank (43) or the second drive crank (45).

5 5. The wiper system of claim 1, characterized in that the first and second drive cranks (43, 45) are each connected in articulated fashion to a respective engine crank (59, 67).

10 6. The wiper system of claim 1, characterized in that the engine crank (59, 67) is displaceable transversely, or essentially transversely, to the first and second shafts (21, 29).

15 7. The wiper system of claim 1, characterized in that the second coupling part (13) is longer, preferably markedly longer, than the first coupling part (11).

20 8. The wiper system of claim 1, characterized in that the wiper arm (35) is secured to one of the first and second coupling parts (11, 13), preferably the longer coupling part (13).

25 9. The wiper system of claim 1, characterized in that the joints (17, 19) between the pivot levers (5, 7) and the coupling element (9) and the additional joint (15) between the coupling parts (11, 13) are embodied as cylindrical joints, whose pivot axes extend parallel to one another and preferably parallel to the first and second shafts (21, 29).

30 10. A method for operating a wiper lever linkage of a wiper system for vehicles, the wiper lever linkage having at least one wiper arm, in particular of claim 1, which wiper lever linkage includes a first pivot lever, which can be coupled to a stationary first shaft in a manner fixed against relative

rotation, a second pivot lever which can be coupled to a stationary second shaft in a manner fixed against relative rotation, a first drive crank which can be coupled to the first shaft in a manner fixed against relative rotation, a second drive crank which can be coupled to the second shaft in a manner fixed against relative rotation, and a coupling member connected in articulated fashion to the drive cranks, having the following steps:

- during one wiping cycle, the first and second drive cranks are first pivoted out of an outset position of the wiper lever linkage in the same direction until they are in an extended position, in which the coupling member and the first drive crank are aligned with one another;

- next, upon a displacement of the wiper lever linkage out of the extended position into a turning point position, the first drive crank is pivoted onward in the same direction and the second drive crank is pivoted onward in the opposite direction.

11. The method of claim 10, characterized in that the pivoting motions of the drive cranks are dependent on one another.

51PRTS

09/868143

J003 Rec'd PCT/IPC

15 JUN 2001

WIPER SYSTEM FOR VEHICLES AND METHOD FOR DRIVING A WIPER
LEVER LINKAGE

Prior Art

The invention relates to a wiper system for vehicles as
generically defined by the preamble to claim 1 and to a
method for operating a wiper lever linkage of a wiper system
for vehicles of claim 10.

A known wiper system has a pivot lever that can be
pivoted freely about a stationary shaft, and a wiper arm
provided with a wiper element is secured to the pivot lever.
Because of this design, the wiper arm takes a circular path,
which means only a small swept field, which in many cases
does not meet requirements.

A wiper system is also known that has a four-bar wiper
lever linkage which includes first and second pivot levers
that are each coupled in a manner fixed against relative
rotation to a stationary shaft and connected in articulated
fashion to a coupling element. A wiper arm provided with a
wiping element is secured to the coupling element and upon
pivoting of the pivot lever executes a reciprocating-pivoting
motion, which leads to an enlargement of the swept field. A
disadvantage in the known wiper system is the large
installation space required for the wiper lever linkage,
space that if the wiper system is to be used to clean a
windshield of a motor vehicle must be made available in the
region of the front end of the vehicle. However, there is
little space in the front-end region of the motor vehicle,
and in future vehicles there will be even less, since the

proportion of the length of the interior to the total length of the motor vehicle is becoming greater and greater. It is also found that the swept field of the four-bar wiper lever linkage is not large enough to meet legal requirements, or
5 increasing demands for comfort and safety, given the large window surfaces planned for vehicles in the future in particular.

Advantages of the Invention

The wiper system of the invention having the characteristics of claim 1 has the advantage over the prior
10 art that for the same installation space, a markedly longer stroke and thus a larger swept field can be achieved with the wiper lever linkage than in the known wiper system with the four-bar wiper lever linkage. It is understood that it is
15 also possible to design a wiper lever linkage that, for at least essentially the same-sized swept field or essentially the same feasible stroke length in the known four-bar wiper lever linkage, has a smaller installation space. To achieve
20 a large swept field with a compact design of the wiper lever linkage, it is provided in the wiper system of the invention that the coupling element is embodied in multiple parts and has a first coupling part and a second coupling part, which
25 are coupled to one another with the aid of a joint. A five-bar wiper lever linkage is thus created in which an exact control of the stroke is possible.

In an especially advantageous exemplary embodiment of the wiper system, the wiper lever linkage is assigned a drive device, which has first and second drive cranks, of which the first drive crank is coupled in a manner fixed against
30 relative rotation to the first shaft, to which the first pivot lever is also secured, and the second drive crank is

coupled in a manner fixed against relative rotation to the second shaft, on which the second is retained. In other words, the first and second shafts can each be subjected to a driving or braking moment that is transmitted via the pivot levers to the wiper lever linkage.

In an advantageous variant embodiment, the first and second drive cranks are connected to one another in articulated fashion with the aid of a coupling member. As a result, the motions of the first and second drive cranks and thus also of the first and second pivot levers are dependent on one another, and hence the degree of freedom of the wiper lever linkage, provided by the additional joint between the first coupling part and the second coupling part, is balanced or compensated for. To adapt the motions of the two drive cranks to one another, in another variant embodiment the first and second drive cranks are each connected in articulated fashion to an engine crank, and the engine cranks in turn are coupled to one another in such a way that their oscillating motions are adapted exactly to one another. In both variant embodiments, for controlling the pivoting motion of the drive cranks and thus also of the first and second pivot levers, the pivot angle of the second drive crank is adjustable freely, independently of the multi-part coupling element that connects the pivot levers to one another, since the first and second coupling parts of the coupling element are connected to one another in articulated fashion, thus providing one additional degree of freedom for the polygonal joint. Adjusting the pivot angle of the second drive crank can be done for instance by changing the length of the coupling member.

Further advantageous features of the wiper system will become apparent from the other dependent claims.

5 The subject of the invention also pertains to a method
for driving a wiper lever linkage of a wiper system for
vehicles, having the characteristics of claim 10, in which it
is provided that the first and second drive cranks, during
one wiping cycle, are pivoted out of an outset position of
the wiper lever linkage in the same direction until they
reach an extended position, in which the coupling member,
which can for instance be in rod form, and the first drive
crank are aligned with one another. In the further course of
10 the wiping cycle, in which the wiper lever linkage is
displaced out of the extended position to a turning point
position, the first drive crank is pivoted onward in the same
direction and the second drive crank is pivoted onward in the
opposite direction. To optimize the course of motion of the
wiper lever linkage, it is designed such that during one
15 wiping cycle, the first drive crank has two turning positions
and the second drive crank has three turning positions, in
each of which a reversal of the pivoting direction takes
place.

20 Further advantageous embodiments of the method will
become apparent from the other dependent claims.

Drawing

The invention will be described in further detail below
in conjunction with the drawing. Shown are:

25 Fig. 1, a basic sketch of a portion of a first
exemplary embodiment of the wiper system of the invention;

Fig. 2, a basic sketch of a first exemplary embodiment
of a drive device for a wiper lever linkage;

Fig. 3, a basic sketch of a second exemplary embodiment of a drive device;

Figs. 4A-4C, one exemplary embodiment of the wiper lever linkage in three positions;

5 Fig. 5, a graph showing the stroke course of the wiper lever linkage during one wiping cycle;

Figs. 6A and 6B, a plurality of swept fields that can be achieved with the wiper lever linkage;

10 Fig. 7, pivoting ranges of drive cranks and of a coupling member connected to them in articulated fashion; and

Fig. 8, the pivoting range of a first drive crank and of a second drive crank in a known four-bar wiper lever linkage.

Description of the Exemplary Embodiments

15 The wiper system 1 described below can be widely used, for instance for motor vehicles (passenger cars, trucks, buses), rail cars, or watercraft. Purely as an example, it will be assumed below that it is a wiper system for a motor vehicle.

20 Fig. 1 schematically shows part of a first exemplary embodiment of the wiper system 1, which includes a wiper lever linkage 3 that has a first pivot lever 5, a second pivot lever 7, and a coupling element 9. The coupling element 9 is embodied in multiple parts and has a first
25 coupling part 11 and a second coupling part 13, which are coupled to one another with the aid of a joint 15. The

second coupling part 13 is markedly longer, in this exemplary embodiment multiple times longer, than the first coupling part 11.

The first coupling part 11 and the first pivot lever 5 are coupled in articulated fashion to one another via a joint 17, and the second coupling part 13 and the second pivot lever 7 are coupled in articulated fashion to one another with the aid of a joint 19. The first pivot lever 5, on its end region remote from the first coupling part 11, is coupled in a manner fixed against relative rotation to a first shaft 21 of a first bearing 23, so that upon pivoting of the first shaft 21 about its longitudinal center axis, extending perpendicular to the plane of the drawing in Fig. 1, the first pivot lever 5 is correspondingly pivoted along with it. Spaced apart from the first bearing 23, a second bearing 25 is provided, which - like the first bearing 23 - is disposed stationary on a base 27, represented by a dashed line. The second bearing 25 has a second shaft 29, which is pivotably supported about its longitudinal center axis, and with which the second pivot lever 7 is connected in a manner fixed against relative rotation. Thus the shafts 21, 29 more or less form further joints 31, 33 of the wiper lever linkage 3, which has a total of five joints.

The wiper lever linkage 3 has a wiper arm 35, which is secured to the second coupling part 13 of the coupling element 9. The angle α between the wiper arm 35, which has an angled base body, and the second coupling part 13 is accordingly constant during a reciprocating-pivoting motion of the wiper lever linkage 3 and in this case amounts to approximately 55° .

A wiper element, not shown in Fig. 1, that can for

instance have a rubber lip is mounted on the wiper arm 35 and can be pressed in a known manner against a window of the vehicle and displaced accordingly upon a reciprocating-pivoting motion of the wiper lever linkage 3. In the process a swept field 37 is swept, whose shape, disposition and size are defined by the reciprocating-pivoting motion of the wiper lever linkage 3. Only the lower edge 39 of the swept field 37 is visible in the view of Fig. 1; this edge has a curved course, but besides curved portions linear portions are also present, in which the wiper arm 35 - viewed in the vertical direction - is lifted, or upon a reversal of the pivoting direction of the wiper arm 35 is lowered, or is displaced essentially in the horizontal direction.

The ratio between the lengths of the first and second coupling parts 11, 13 varies markedly. The first coupling part 11 that creates the stroke has a relatively short length, so that by its motion the least possible rotary motion is transmitted to the long second coupling part 13, because the result could otherwise be the destruction of the course of motion of the wiper lever linkage 3.

The wiper system 1 further includes a drive device 41 for the wiper lever linkage 3; all that can be seen in Fig. 1 of this drive device are a first drive crank 43 and a second drive crank 45. The first drive crank 43 is coupled in a manner fixed against relative rotation to the first shaft 21, with which the first pivot lever 5 is also connected. The disposition of the first drive crank 43 and the first pivot lever 5 on the shaft 21 is selected such that they are disposed facing one another in a pivoted position; because of the connection in a manner fixed against relative rotation between the first shaft 21 and the drive crank 43 and the pivot lever 5, the angle α between these parts is constant

during a reciprocating-pivoting motion of the wiper lever linkage 3. The second drive crank 45 is disposed on the second shaft 29 at a position that is offset in terms of rotational angle from the second pivot lever 7 and is
5 connected to the second shaft in a manner fixed against relative rotation. Because of this design, the angle γ between the drive crank 45 and the pivot lever 7 is also constant during a displacement of the wiper lever linkage 3.

The first and second drive cranks 43, 45 are joined to
10 one another with the aid of a coupling member 47, which via a joint 49 is connected in articulated fashion to the first drive crank 43 a further joint 51 to the second drive crank 45. Because of the coupling of the two drive cranks 43, 45 to one another, precise control of the pivoting motions of the pivot levers 5, 7 is feasible in a simple way, as will be described in further detail hereinafter.

In Fig. 1, a dashed line represents a known four-bar wiper lever linkage, which likewise has first and second pivot levers that are joined together via a rigid, one-piece
20 coupling element; the coupling element is connected to the pivot levers each via a respective joint. A wiper arm with a wiping element is also mounted on the four-bar wiper lever linkage, and upon a reciprocating-pivoting motion of the wiper lever linkage, this arm sweeps a swept field whose
25 lower edge 43 is represented by a dashed line in Fig. 1. A comparison shows that the swept field of the five-bar wiper lever linkage 3 and that of the four-bar wiper lever linkage are essentially the same size; that is, the height and width of the swept fields are approximately the same. The wiper
30 lever linkage 3 of the invention, however, requires markedly less installation space than the conventional four-bar wiper lever linkage, which is advantageous particularly when the

wiper lever linkage 3 is disposed in the front-end region of a motor vehicle, since there is only little space available there to accommodate the wiper system 1. One reason for the compact design of the wiper lever linkage 3 is especially the lesser spacing of the first bearing 23 from the second bearing 25 for the wiper lever linkage 3, which is possible only because of the multi-part design of the coupling element 9.

Below, in conjunction with Figs. 2 and 3, one exemplary embodiment each of the drive device 41 for the drive cranks 43, 45 will be described in further detail. Parts that have already been described in conjunction with the wiper system 1 shown in Fig. 1 are identified by the same reference numerals and so for their description, reference is made to the description of Fig. 1.

The drive device 41 has a drive shaft 55, disposed in stationary fashion spaced apart from the bearings 23, 25 of the wiper lever linkage 3, preferably toward the middle of the vehicle, and the drive shaft can be subjected to a driving or braking moment and is rotatable about its longitudinal center axis extending perpendicular to the plane of Fig. 2. A transmission lever 57 is secured to the drive shaft 55 and rotates jointly with it upon a rotation of the drive shaft. The drive device 41, which in the exemplary embodiment shown in Fig. 2 is embodied as an in-line drive mechanism, also has an engine crank 59, which is connected in articulated fashion to the transmission lever 57 via a joint 61 and, on its other end region, to the first drive crank 21 via a further joint 63. Upon rotation of the drive shaft 55, the engine crank 59 is displaced back and forth in the direction of a double-headed arrow 65. Because of the coupling in articulated fashion of the engine crank 59 to the

first drive crank 43, upon an oscillating motion of the engine crank 59 the drive crank 43 and, because of its coupling to the second drive crank 45 via the coupling member 47, the second drive crank 45 as well, are pivoted jointly about the first shaft 21 and the second shaft 29, respectively. Thus both shafts 21, 29 are driven.

In the exemplary embodiment of the drive device 41 shown in Fig. 3, a direct drive for the shafts 21, 29 is realized. Here, the drive cranks 43, 45 are not joined together via a coupling member 47 described in conjunction with Figs. 1 and 2, but rather via engine cranks 59 and 67, of which the engine crank 59 is connected in articulated fashion to the first drive crank 43 by means of the joint 63, and the other engine crank 67 is connected in articulated fashion to the second drive crank 45, via the joint 51. In their end regions remote from the drive cranks, the engine cranks 59, 67 are each connected to one another in articulated fashion via a joint 69 by a transmission lever 57 formed by a triangular plate 71; the transmission lever 57 is connected to the drive shaft 55 in a manner fixed against relative rotation. Upon a rotation of the drive shaft 55 about its longitudinal center axis, the engine cranks 59, 67 are displaced essentially in the horizontal direction, oscillating in the direction of the arrows 65, and as a result the drive cranks 43, 45 and thus not only the shafts 21, 29 but also the first and second pivot levers 5, 7 connected to the shafts are pivoted in the corresponding direction.

The joints 17, 19 between the pivot levers 5, 7 and the coupling element 9 and the additional joint 15 between the coupling parts 11, 13, and preferably the joints 51, 61, 63, 69 of the drive device 41, are all, in an advantageous

exemplary embodiment, embodied as cylindrical joints, whose pivot axes extend parallel to one another and preferably parallel to the first and second shafts 21, 29. In an advantageous exemplary embodiment, the joints of the wiper lever linkage 3 are embodied as separable shaft and hub connections that transmit moments. The cylindrical joints have high rigidity. It is understood that it is also possible for at least some of the joints to be embodied as ball joints.

The motion of the wiper lever linkages 3 of the wiper system 1 shown in Fig. 1 will now be described in further detail in conjunction with Figs. 4A-4C; the wiper lever linkage is shown in a different position in each of these Figs. It can be seen that the wiper lever linkage 3 is driven by a drive device 41 as described in conjunction with Fig. 3.

In the position shown in Fig. 4A, the wiper lever linkage 3 is in an outset position, in which the wiper arm 35 is disposed outside the swept field 37, preferably essentially parallel to an imaginary horizontal line. With the aid of the drive device 41, the first and second drive cranks 43, 45, which are connected to one another via the coupling member 47, are pivoted counterclockwise until they reach their position shown in Fig. 4B, as indicated by arrows 73, 75. In the position shown in Fig. 4B, the wiper lever linkage 3 is in an extended position, in which the coupling member 47 and the first drive crank 43 are aligned with one another. It can be seen that in this functional position, the first and second coupling parts 11, 13 are not in an extended position but rather are inclined relative to one another; hence jamming of the wiper lever linkage 3 can be practically precluded. In the extended position of the wiper

lever linkage 3, the wiper arm 35 is disposed in a position in which it has attained its maximum stroke. A reversal of the pivoting direction of the second drive crank now takes place in the extended position of the wiper lever linkage 3; that is, the second drive crank 45 is now pivoted in the opposite direction, that is, clockwise, while the first drive crank 43 is pivoted onward counterclockwise (arrow 73). The drive cranks 43, 45 now have opposed pivoting directions, until such time as the wiper lever linkage 3 is displaced into the turning point position shown in Fig. 4C, at which position half of a wiping cycle has been completed.

In the turning point position of the wiper lever linkage 3, the wiper arm 35 is disposed at a slight spacing from an A pillar of the vehicle. To pivot the wiper arm 35 back into its outset position shown in Fig. 4A, the engine crank 59 shown in Fig. 2 is now displaced toward the right by a rotation of the drive shaft 55 in the same direction (Fig. 3). In the process, the first drive crank 43 is pivoted clockwise and the second drive crank 45 is pivoted counterclockwise, until they again reach the extended position shown in Fig. 4B, in which the coupling member 47 and the drive crank 43 are again aligned with one another. At the extended position, a reversal of the direction of rotation of the second drive crank 45 again takes place; this drive crank is now pivoted onward clockwise jointly with the first drive crank 43, until the cranks reach the turning point position shown in Fig. 4A. One complete wiping cycle has now been concluded.

Fig. 5 shows a graph in which the stroke H of a wiper lever linkage, of the type addressed here, is plotted on the ordinate, and the pivot angle omega of the first drive crank 43 is plotted on the abscissa. A curve 77 shown in Fig. 5

indicates the stroke course of the five-bar wiper lever linkage 3 described in the preceding drawings, which has the shape of a parabola, with the turning point of the parabola located approximately at $\omega = 70^\circ$, which is equivalent to the extended position of the wiper lever linkage 3 in Fig. 4B. A curve 79 is shown in a dashed line, indicating the stroke course of a conventional four-bar wiper lever linkage. A comparison clearly shows that the maximum stroke of the four-bar wiper lever linkage is markedly shorter than that of the wiper lever linkage 3 of the invention, and the differential stroke ΔH is achieved by means of the two-part coupling element 9, whose stroke course is represented by a curve 81.

As Fig. 5 shows, the total stroke of the five-bar wiper lever linkage 3 is thus formed of two partial strokes. The first partial stroke is formed inside the coupling element 9, while the other partial stroke takes place between the pivot point (shaft 21), affixed to the frame, of the drive crank 43 and the coupling bearing point (joint 51) of the second drive crank 45. The sum of the two partial strokes is the total stroke of the five-bar wiper lever linkage 3. The kinematic design of the wiper lever linkage 3 is preferably selected such that the maximum of the two partial strokes occurs simultaneously, so that the largest possible total stroke is thus attained. It is also advantageous that the location of the maximum stroke of the wiper lever linkage 3 can be selected relatively freely, since the disposition of the site of the maximum stroke of each of the two partial strokes offers a plurality of combination options in which lever lengths or the locations of the pivot points of the joints are varied accordingly.

In Fig. 6A, an exemplary embodiment of the wiper lever linkage 3 is shown with which a swept field 37 is realized

whose edge 39 is represented by a solid line. The edge 83 of a swept field, in the form of a partial circle of a known wiper lever linkage is shown that has an uncontrolled stroke; that is, its wiper arm is merely pivoted about a stationary shaft. The edge 83 accordingly has a circular shape with the center point of the pivoting axis of the wiper arm. Fig. 6A also shows a further swept field with an edge 85 that can be achieved with a known four-bar wiper lever linkage of the kind described in conjunction with Fig. 1. It can be seen that compared to the feasible stroke with the known four-bar wiper lever linkage - preferably at a substantially equal structural size - the stroke of the wiper lever linkage 3 of the invention is markedly longer. The large swept field means greater safety and comfort for a vehicle occupant.

In Fig. 6B, other swept fields 37 with the edges 39 and 39', respectively, that can be achieved with the wiper lever linkage 3 of the invention are shown. To determine the geometry of the swept field 37, only the lengths of the pivot levers 5, 7, and of the coupling element 9 or the coupling parts 11, 13 and of the first and second drive cranks 43, 45 have to be suitably set or adapted to one another. In addition, by adapting a course of motion of the first and second drive cranks 43, 45 to one another, influence can also be exerted on the geometry of the swept field.

Fig. 7 shows a detail of an exemplary embodiment of the wiper lever linkage 3 and of the drive device 41. In detail, the pivoting region 87 of the first pivot lever 5, the pivoting region 89 of the second pivot lever 7, the pivoting region 91 of the first drive crank 43, the pivoting region 93 of the second drive crank 45, and the pivoting region 95 of the coupling member 47 are shown. In comparison, Fig. 8 shows the pivoting regions 97 and 99 of first and second

5 pivot levers 101 and 103 in the known four-bar wiper lever linkage 105. The pivot lever 101 is connected in a manner fixed against relative rotation to a shaft 107 of a stationary bearing 109, and the second pivot lever 103 is connected in a manner fixed against relative rotation to a shaft 111 of a second bearing 113. It becomes clear that the pivoting region 89 of the second pivot lever 7 of the five-bar wiper lever linkage 3 of the invention is markedly larger than the pivoting region 99 of the second pivot lever 103 of the known four-bar wiper lever linkage 105, while the pivoting region 87 of the first pivot lever 5 and the pivoting region 97 of the first pivot lever 101 are essentially the same size.

10 In summary, it can be stated that by means of the five-bar wiper lever linkage 3 described in conjunction with the preceding drawings, a markedly longer stroke and thus an enlarged swept field are feasible than with the wiper lever linkages described at the outset, and this can be attained by means of the coupling parts 11, 13 that are connected in articulated fashion to one another and to the first and second pivot levers 5, 7. A further advantage of the five-bar wiper lever linkage 3 is that the joint technology and preferably at least some parts of the drive device can be adopted from the known four-bar wiper lever linkage. The wiper lever linkage 3 has reduced gear ratios compared to the known wiper lever linkage, and as a result the kinematic quality of the mechanism is improved, and thus the motor attraction moment required for operation (the torque to be exerted on the drive shaft 55) is reduced. The wiper lever linkage 3 has a simple design, especially because complicated cross-angle mechanisms can be dispensed with.

It is also advantageous that the relative angles

between the moving parts (first pivot lever 5 and first coupling part 11; second pivot lever 7 and second coupling part 13) of the five-bar wiper lever linkage 3 are markedly less than in a known four-bar wiper lever linkage. As a result, there is also less stress on the joints, and so smaller joints can optionally be used.

Claims

1. A wiper system for vehicles, having at least one wiper lever linkage that has at least one wiper arm and that includes a first pivot lever, which can be coupled to a stationary first shaft in a manner fixed against relative rotation, and a second pivot lever that can be coupled to a stationary second shaft in a manner fixed against relative rotation, the pivot levers being connected in articulated fashion to a coupling element, characterized in that the coupling element (9) is embodied in multiple parts and has a first coupling part (11) and a second coupling part (13), which are coupled to one another with the aid of a joint (15).

2. The wiper system of claim 1, characterized by a drive device (41) for the wiper lever linkage (3), which device includes at least one first drive crank (43) that can be coupled in a manner fixed against relative rotation to the first shaft (21) or the second shaft (29).

3. The wiper system of one of the foregoing claims, characterized in that the first drive crank (43) can be coupled to the first shaft (21) in a manner fixed against relative rotation, and that the drive device (41) has a second drive crank (45) that can be coupled in a manner fixed against relative rotation to the second shaft (29).

4. The wiper system of one of the foregoing claims, characterized by a coupling member (47), which joins the first and second drive cranks (43, 45) to one another and which is coupled to the drive cranks (43, 45) via a respective joint (49, 51), and that at least one engine crank

(59) is connected in articulated fashion to the first drive crank (43) or the second drive crank (45).

5. The wiper system of one of the foregoing claims 1-3, characterized in that the first and second drive cranks (43, 45) are each connected in articulated fashion to a respective engine crank (59, 67).

6. The wiper system of one of the foregoing claims, characterized in that the engine crank (59, 67) is displaceable transversely, or essentially transversely, to the first and second shafts (21, 29).

7. The wiper system of one of the foregoing claims, characterized in that the second coupling part (13) is longer, preferably markedly longer, than the first coupling part (11).

8. The wiper system of one of the foregoing claims, characterized in that the wiper arm (35) is secured to one of the first and second coupling parts (11, 13), preferably the longer coupling part (13).

9. The wiper system of one of the foregoing claims, characterized in that the joints (17, 19) between the pivot levers (5, 7) and the coupling element (9) and the additional joint (15) between the coupling parts (11, 13) are embodied as cylindrical joints, whose pivot axes extend parallel to one another and preferably parallel to the first and second shafts (21, 29).

10. A method for operating a wiper lever linkage of a wiper system for vehicles, the wiper lever linkage having at least one wiper arm, in particular of one or more of the

foregoing claims, which wiper lever linkage includes a first
5 pivot lever, which can be coupled to a stationary first shaft
in a manner fixed against relative rotation, a second pivot
lever which can be coupled to a stationary second shaft in a
manner fixed against relative rotation, a first drive crank
which can be coupled to the first shaft in a manner fixed
10 against relative rotation, a second drive crank which can be
coupled to the second shaft in a manner fixed against
relative rotation, and a coupling member connected in
articulated fashion to the drive cranks, having the following
steps:

15 - during one wiping cycle, the first and second drive
cranks are first pivoted out of an outset position of the
wiper lever linkage in the same direction until they are in
an extended position, in which the coupling member and the
first drive crank are aligned with one another;

20 - next, upon a displacement of the wiper lever linkage
out of the extended position into a turning point position,
the first drive crank is pivoted onward in the same direction
and the second drive crank is pivoted onward in the opposite
direction.

11. The method of claim 10, characterized in that the
pivoting motions of the drive cranks are dependent on one
another.

Abstract

10
15
A wiper system (1) for vehicles, having at least one wiper lever linkage (3) that has at least one wiper arm (35), and a method for operating the wiper lever linkage (3), are proposed. The wiper lever linkage has a first pivot lever (5), which can be coupled to a stationary first shaft (21) in a manner fixed against relative rotation, and a second pivot lever (7) that can be coupled to a stationary second shaft (29) in a manner fixed against relative rotation, the pivot levers being connected in articulated fashion to a coupling element (9). The wiper system (1) is distinguished in that the coupling element (9) is embodied in multiple parts and has a first coupling part (11) and a second coupling part (13), which are coupled to one another with the aid of a joint (15).

(Fig. 1)

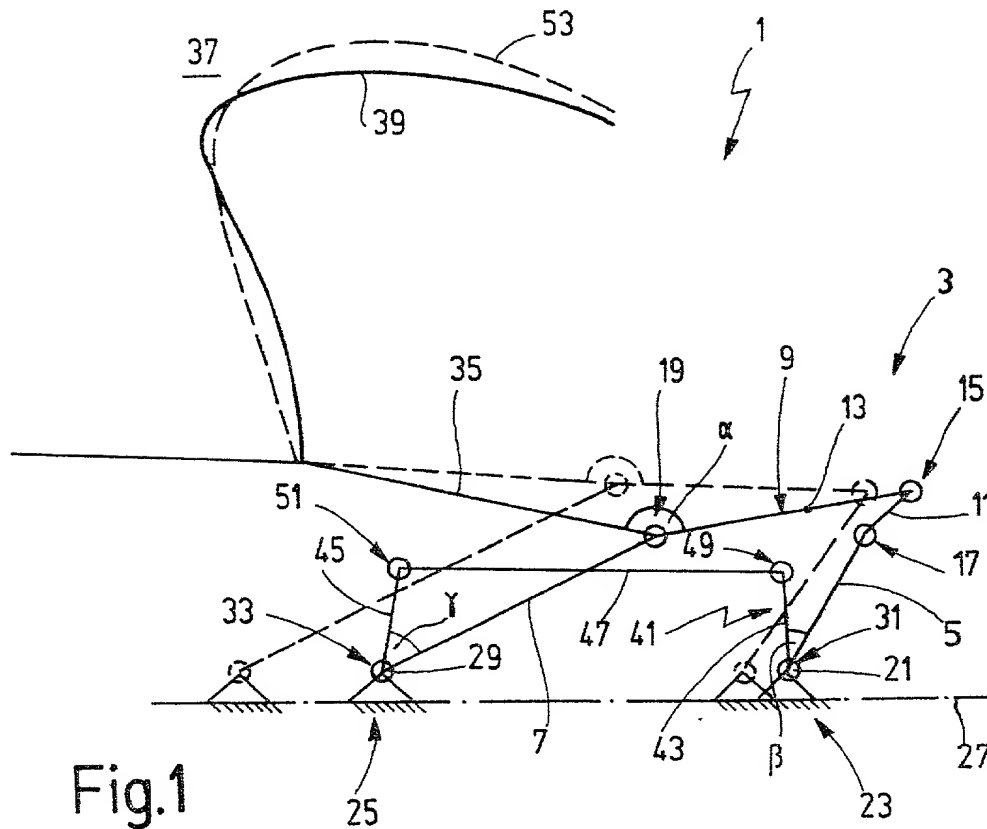


Fig.1

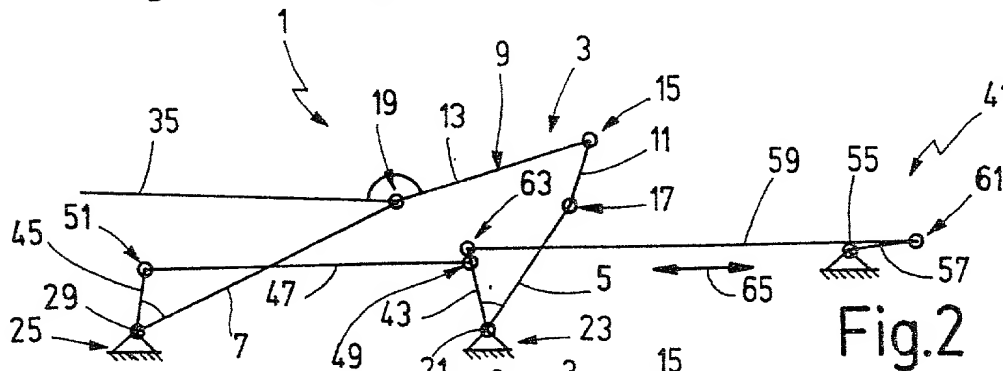


Fig.2

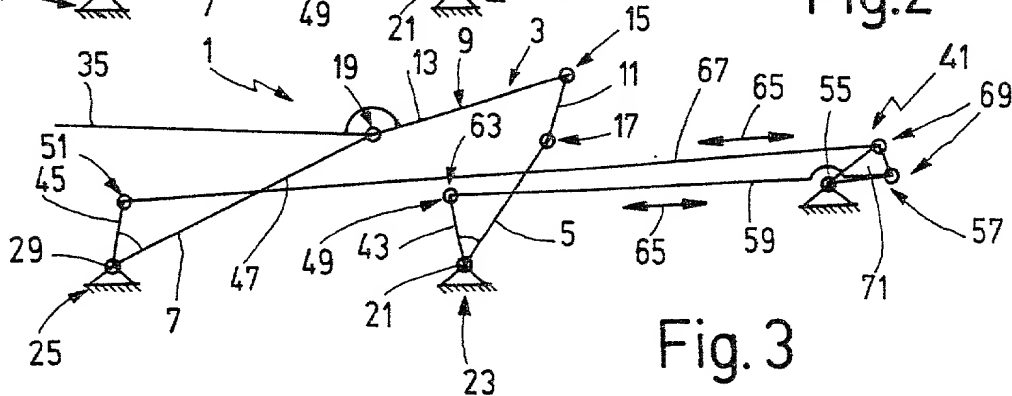


Fig. 3

Fig. 4A

Fig. 4B

Fig. 4C

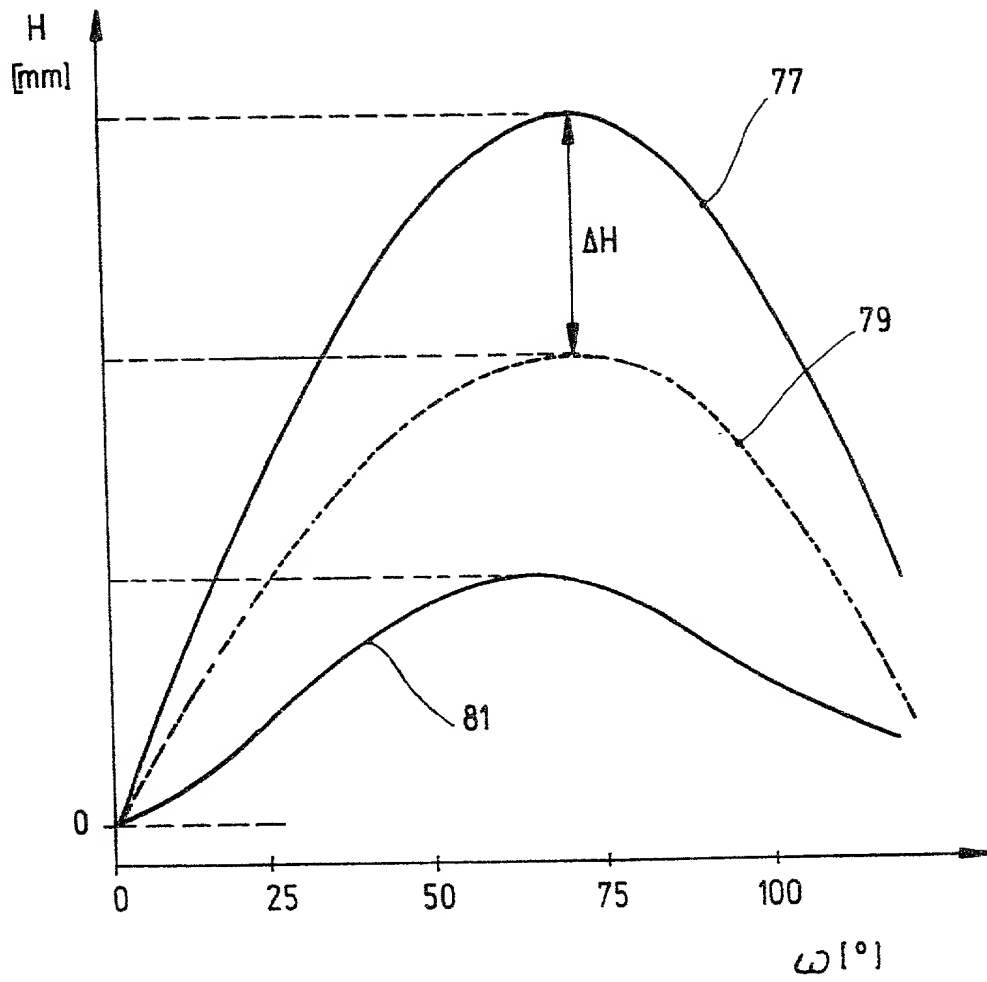


Fig.5

Fig. 6A

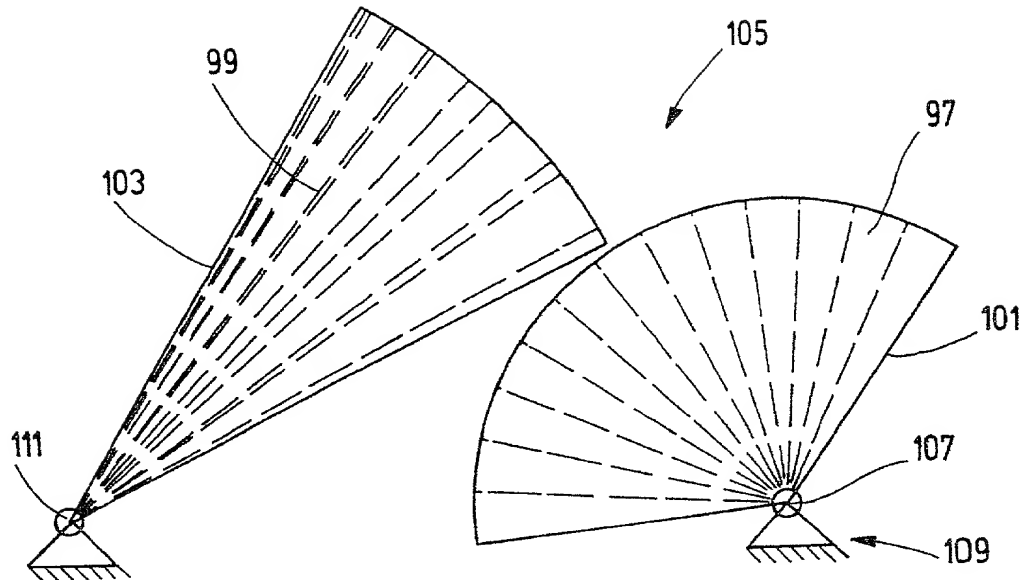


Fig. 8

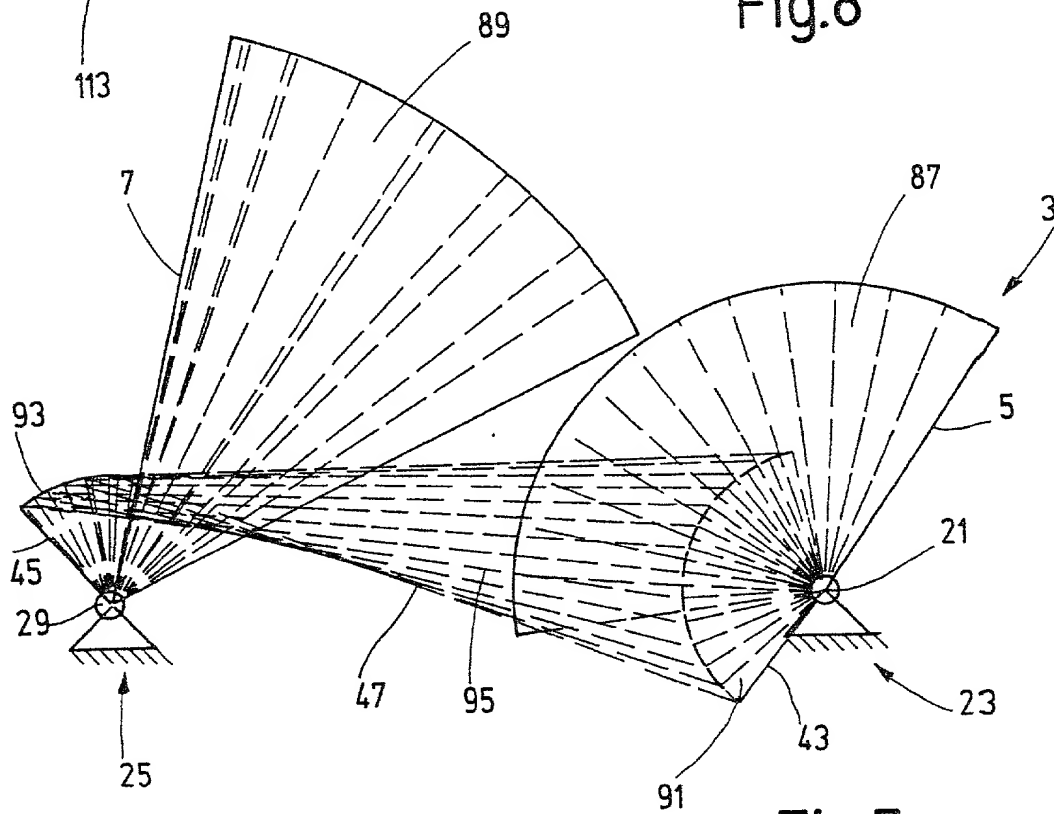


Fig. 7

R. 36395

DECLARATION AND POWER OF ATTORNEY FOR NATIONAL STAGE OF PCT PATENT APPLICATION

As a below-named inventor, I hereby declare that:

Joachim ZIMMER

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **WIPER SYSTEM FOR VEHICLES AND METHOD FOR DRIVING A WIPER LEVER LINKAGE** the specification of which was filed as PCT International Application number PCT/DE 00/03655 on October 18, 2000.

I hereby state that I believe the named inventor or inventors in this Declaration to be the original and first inventor or inventors of the subject matter which is claimed and for which a patent is sought.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365 (b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior foreign application(s):

Priority claimed:

<u>199 50 740.6</u>	<u>GERMANY</u>	<u>October 21, 1999</u>	<u>X</u>	
(Number)	(Country)	(Date filed)	Yes	No
<u> </u>	<u> </u>	<u> </u>	<u>Yes</u>	<u>No</u>
(Number)	(Country)	(Date filed)	Yes	No


As a named inventor, I hereby appoint the following attorney to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Michael J. Striker, Reg. No. 27233

Direct all telephone calls to Striker, Striker & Stenby at telephone no.: (631) 549 4700 and address and all correspondence to:

STRIKER, STRIKER & STENBY
103 East Neck Road
Huntington, New York 11743
U.S.A.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such wilful false statement may jeopardize the validity of the application or any patent issued thereon.

Signature: 	Date: <i>Nov-28-2001</i>	Residence and Full Postal Address: Uhlandstrasse 5 77880 Sasbach Germany <i>DEX</i>
Full Name of First or Sole Inventor: <u>Joachim ZIMMER</u>	Citizenship: GERMAN	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Second Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Third Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Fourth Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Fifth Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Sixth Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Seventh Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Eighth Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Ninth Inventor:	Citizenship:	

11/28/01 11:11 AM